


SOLUTIONS FOR PROFESSIONAL CONSTRUCTION







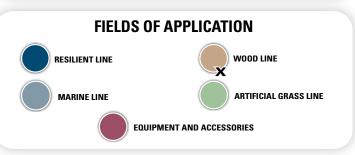

M0401-1 Rev4.0

GREY OFF

TREATMENT FOR RENOVATING GREYED WOOD

DESCRIPTION AND USAGE

FOR PROFESSIONAL USE ONLY

Specifically formulated water-based treatment for eliminating the grey patina forming on wooden surfaces exposed to the weather. Restores tone, colour and vitality to faded wood, and to teak and tropical woods in particular.

PRODUCT CHARACTERISTICS



Application Brush



Suitable for outdoor use



Chemical base

Mixture of selected additives in aqueous emulsion



Storage

24 months in original containers, in a cool, dry place away from sunlight and protected against cold temperatures (>10°C). Once the container has been opened, close again carefully after each use



Appearance Liquid



Colour Orange



Usage temperature +10 - +30 °C



Mix before use



Protect from frost

INSTRUCTION FOR USE

Shake well before use. Brush GREY OFF generously onto the surface to be treated. Leave to work for 15-20 minutes, and then scrub (with a plastic bristle brush) or hose off the dirt. Repeat as required to achieve the desired result. Once the cleaning treatment is complete, rinse with water, leave to dry and then sand lightly. Keep away from metal parts, as the product may cause corrosion. The cleaned wood may then be treated with MOSS REMOVER and KIPOS OIL (see relative product data sheets)

INSTRUCTIONS

FOR SAFETY AND DISPOSAL: This product is acidic. Protect the hands with rubber gloves. Avoid contact with the eyes and skin. Wear protective goggles. In the event of contact with the eyes, rinse immediately with plenty of clean water. Keep out of reach of children. Do not dispose of residual product on soil, in surface water or in drains. Once dry, residual product may be disposed of as normal domestic refuse. Recycle empty containers. When disposing of the product and other waste produced during usage, comply with the terms of Italian Law Decree 152/2006 and subsequent modifications (Unified Environmental Law). For more information, contact our technical support service. The contents of this sheet replace and supersede the contents of the previous edition.

NOTE: The information given herein is based on our extensive theoretical and practical knowledge. However, as it is impossible to go into exhaustive detail, the contents of this sheet are not binding in nature. Please contact our technical service in case of any doubt.